


LED Down Light – INDLED- L

INDLED-L uses specific lens to produce 16° or 36° beam angle. It's suitable for commercial lighting such as office lighting, display lighting.

Key Features:

- Using OSRAM 15W OSTAR LED, can provide color temperature of 2700K-6500K of high brightness white light
- Using custom design lens, can provide 16 deg and 36 deg Beam angle
- Provide 1-10V dimming interface, 5%-100% dimming capable option
- IP20, suitable for indoor applications
- External constant current source power supply, eliminate power supply fluctuation problem

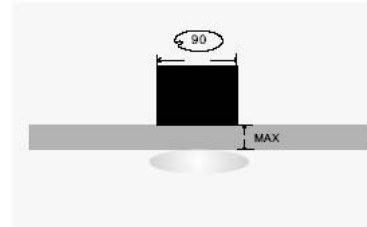

Material:

Body: Aluminum

Frame: Die cast Aluminum

Heat Sink: Aluminum

Dimming power supply casing: Plastic

Light Source:

OSRAM OSTAR



Control specifications:

Input: 100V-240VAC 50/60Hz





Output: 700mA constant current

Dimming control: 1-10V dimming control interface input option

Dimming rate: 5%-100% dimming

Installation:

100-240VAC input, standard L, N, PE lines

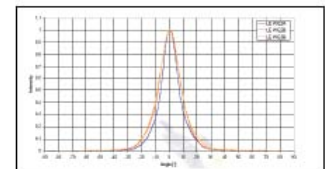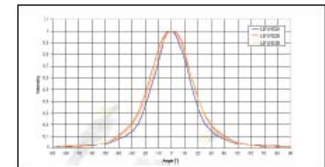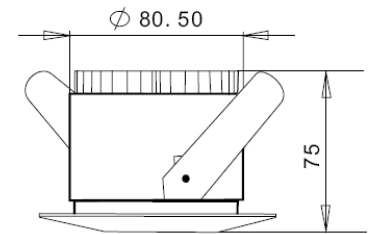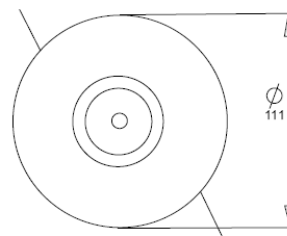

Ordering Guide

Part No.	LED	Description	Color Temp.	Color rendering	Operating current(mA)	Luminous flux (Lumens)	Ordering code
DDL-L15W/50-W DIM	LEWE3B/ LECWE3B	15W LED downlight, 36 deg beam, AC input, 1-10V dimming interface	4500K-5000K Cool white	80	700	500-600	10114201-1
			5500K Day light			500-600	10114201-2
			6500K Day light			600-700	10114201-3
DDL-L15W/50-S DIM	LEWE3B/ LECWE3B	15W LED downlight, 16 deg beam, AC input, 1-10V dimming interface	4500K-5000K Cool white	80	700	500-600	10114301-1
			5500K Day light			500-600	10114301-2
			6500K Day light			600-700	10114301-3
DDL-L15W/27-W DIM	LECWE3B	15W LED downlight, 36 deg beam, AC input, 1-10V dimming interface	2700K warm white	80	700	400-450	10114401-1
			3000K warm white			450-500	10114401-2
DDL-L15W/27-S DIM	LECWE3B	15W LED downlight, 16 deg beam, AC input, 1-10V dimming interface	2700K warm white	80	700	400-450	10114501-1
			3000K warm white			450-500	10114501-2
DDL-L15W/50-W	LEWE3B/ LECWE3B	15W LED downlight, 36 deg beam, AC input	4500K-5000K Cool white	80	700	500-600	10112201-1
			5500K Day light			500-600	10112201-2
			6500K Day light			600-700	10112201-3
DDL-L15W/50-S	LEWE3B/ LECWE3B	15W LED downlight, 16 deg beam, AC input	4500K-5000K Cool white	80	700	500-600	10112301-1
			5500K Day light			500-600	10112301-2
			6500K Day light			600-700	10112301-3
DDL-L15W/27-W	LECWE3B	15W LED downlight, 36 deg beam, AC input	2700K warm white	80	700	400-450	10112401-1
			3000K warm white			450-500	10112401-2
DDL-L15W/27-S	LECWE3B	15W LED downlight, 16 deg beam, AC input	2700K warm white	80	700	400-450	10112501-1
			3000K warm white			450-500	10112501-2